


## ZenduCAM 360 Multi Camera Solution to Reduce Risk, Increase Safety of Your Fleets



### C20 Camera

<b>PRODUCT MODEL</b>	927C20
<b>Sensor</b>	1/2.8" 2M Pixel CMOS
<b>Resolution</b>	1920 (H) x 1080 (V)
<b>Minimum Illumination</b>	0.5 Lux (Color Illumination), F1.2
<b>Electronic Shutter</b>	1/30 Second - 1/10000 Second
<b>Black-Light Compensation</b>	Support
<b>S/N</b>	≥ 48db
<b>LENS</b>	2.8mm, 4mm, 8mm M12, Fixed Aperture F1.8
<b>FOV (2.8mm)</b>	H*V 106*57°
<b>FOV (4mm)</b>	H*V 84*46°
<b>FOV (8mm)</b>	H*V 36*20°
<b>Video Compression</b>	H.264, H.265
<b>Compression Output Rate</b>	512Kbps - 8Mbps
<b>IMAGE RESOLUTION</b>	
<b>Main Stream</b>	1080p (720P Optional) @ 30fps
<b>Sub Stream 1</b>	VGA/WD1/D1/QVGA/CIF @ 30fps
<b>Network Stream</b>	Dynamic (adjustable)
<b>CBR/VBR</b>	Support
<b>Audio Compression Standard</b>	ADPCM, G.711A, G.711U, G.726

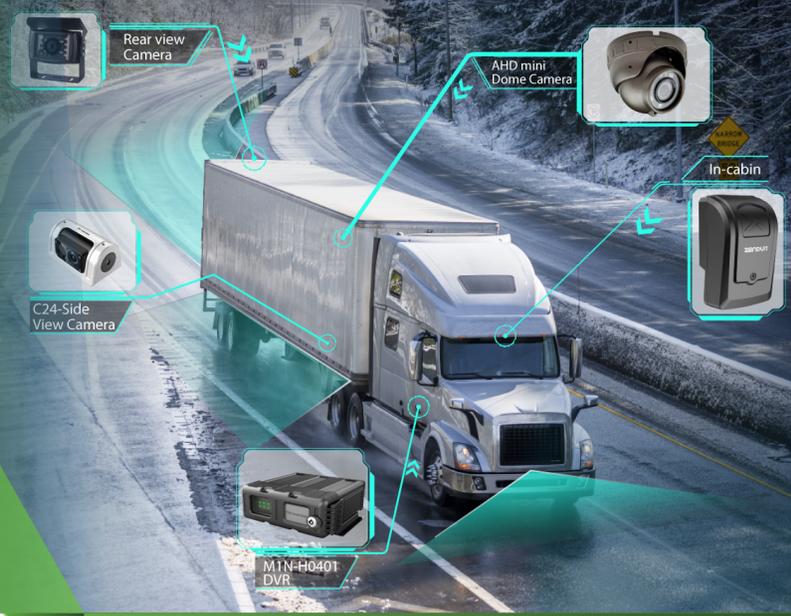

## Small Dome Camera

PRODUCT MODEL	SVT - 6320C (AHD 1080P)	SVT - M5270P (CVBS 800 TVL)	SVT - 6210P (AHD 720P)
CMOS	1/2.8" 1.3M Pixel CMOS	1/3" 1.3M Pixel CMOS	1/3" 1.3M Pixel CMOS
Resolution	1920 (H) x 1080 (V)	800 TVL	1280 (H) * 720 (V)
Format	NTSC/PAL	NTSC/PAL	NTSC/PAL
Minimum Illumination	0.05 Lux (IR off) / 0 Lux (IR on) F1.2	0.05Lux (IR off) / 0Lux (IR on) F1.2	0.05 Lux (IR off) / 0 Lux (IR on) F1.2
IR Distance	8 - 12 m	8 - 15 m	8 - 15 m
WDR	≥ 110dB	NC	NC
S/N	≥ 45dB	≥ 52dB	≥ 52dB
LENS	2.1mm / 2.8mm M12 (Optional)	2.8mm / 3.6mm M12 (Optional)	2.8mm / 3.6mm M12 (Optional)
FOV	<b>2.1mm:</b> H*V 138*77°	<b>2.8mm:</b> H*V 88*50°	<b>2.8mm:</b> H*V 88*50°
	<b>2.8mm:</b> H*V 98*52°	<b>3.6mm:</b> H*V 72*41°	<b>3.6mm:</b> H*V 72*41°
Video Output	1.0Vp-p AHD video output 75 Ω, 4pin DIN JACK	1.0Vp-p AHD video output, 75 Ω, 4pin DIN JACK	1.0Vp-p AHD video output, 75 Ω, 4pin DIN JACK
Audio	Built-in Mic	Built-in Mic	Built-in Mic
Power	DC12V± 10%	DC12V± 10%	DC12V± 10%
Consumption (Max.)	180mA / DC 12V ±5%	180mA / DC 12V ±5%	180mA / DC 12V ±5%
Working Temperature	-40°C ~ 70°C	-40°C ~ 70°C	-40°C ~ 70°C
Dimension	95(W) * 80(H) mm	95(W) * 80(H) mm	95(W) * 80(H) mm
Weight	About 315g	About 315g	About 315g



## Mini Camera C24

<b>Sensor</b>	1/2.8" Sony 2.13M pixels CMOS
<b>Resolution</b>	1920 (H) x 1080 (V)
<b>Minimum Illumination</b>	0LUX (IR on)
<b>S/N</b>	≥ 50dB
<b>Sync System</b>	Inter-sync
<b>Scanning System</b>	Progressive scanning
<b>Lens</b>	2.8mm / 3.6mm Optional
<b>Electronic Shutter</b>	Auto
<b>White Balance Mode</b>	Auto
<b>Color to Black</b>	External Synchronization Control
<b>Gamma Correction</b>	0.55
<b>IR Distance</b>	10m - 15m ( LED*1)
<b>Video Output</b>	AHD coaxial HD standard, 4-pin DIN JACK
<b>Power</b>	DC 12V± 10%
<b>Consumption (Max.)</b>	230mA / DC 12V (IR on)
<b>Working Temperature</b>	-20°C ~ +55°C



## AHD 720P

<b>Sensor</b>	1/3"CMOS
<b>Resolution</b>	1280 x 720
<b>Minimum Illumination</b>	0 LUX when IR ON
<b>Sync System</b>	Inter-sync
<b>Scanning System</b>	Progressive Scanning
<b>S/N</b>	>50db
<b>Lens</b>	3.6 mm, 2.8 mm optional
<b>Electronic Shutter</b>	Auto
<b>White Balance Mode</b>	Auto
<b>Color to Black</b>	Ext
<b>Gamma Correction</b>	User
<b>Video Output</b>	AHD coaxial hd standard, 4 pin air line
<b>Protection Grade</b>	IP66
<b>IR</b>	12IR LED
<b>Power Supply</b>	12VDC +-10%
<b>Consumption (Max.)</b>	130mA/DC12V(IR ON)
<b>Working Temperature</b>	-20 Degree Celsius ~ +55 Degree Celsius



## M1N Mobile Digital Video Recorder

<b>Sensor</b>	Linux 3.18.20
<b>Control Mode</b>	CP4, mouse, EasyCheck, network (3G/4G/WIFI)
<b>Input</b>	4 channels AHD(1080P)+1
<b>Output</b>	1 channel
<b>Total Video Resource</b>	<p>PAL: 4*720P@25fps(AHD)+1*1080P@30fps(IPC) or 4*1080P@10fps(AHD)+1*1080P@30fps(IPC)</p> <p>NTSC: 4*720P@30fps(AHD)+1*1080P@30fps(IPC) or 4*1080P@15fps(AHD)+1*1080P@30fps(IPC)</p>
<b>Audio Input</b>	5channels (1 channel IPC audio input)
<b>Audio Output</b>	(1 channel IPC audio input)
<b>Audio Signal Standard</b>	Electrical level: 2Vpp Input impedance: 4.7kΩ
<b>Display Split</b>	1/4/9
<b>OSD</b>	GPS information, alarm, vehicle No., speed, date/time
<b>Operation Interface</b>	Semi-transparent GUI
<b>Video/Audio Compression</b>	Video: H.264/H.265 Audio: ADPCM, G.711U
<b>Image Resolution</b>	<p>Analog: PAL: 1080P(1920X1080), 720P(1280X720), WD1(928X576), WHD1(928X288), WCIF(464X288), D1(704X576), HD1(704x288), CIF(352x288)</p> <p>NTSC: 1080P(1920X1080), 720P(1280X720), WD1(928X480), WHD1(928X240), WCIF(464X240), D1(704x480), HD1(704x240),CIF(352x240);</p> <p>Digital: 1080P(1920X1080), 720P(1280X720)</p>
<b>Image Quality</b>	1-8 levels adjustable (1 is the best)
<b>Recording Mode</b>	Boot up/Schedule/Alarm
<b>Pre-recording</b>	0-60minutes
<b>Playback Channel</b>	0-30 minutes
<b>Search Mode</b>	Date/time, channel, event
<b>IPC Ethernet</b>	6-pin M12(100M x 1, PON power supply)

<b>GPS</b>	Location tracking, speed detection and time sync
<b>G-Sensor</b>	Built-in three-axis inertia sensor
<b>SD</b>	SD card slot x 2
<b>USB</b>	USB2.0 x 1
<b>RS232</b>	RS232 x 1
<b>Sensor</b>	8 inputs, 2 outputs
<b>Speed</b>	1 channel pulse speed detection
<b>Control Panel</b>	Optional CP4
<b>Intercommunication</b>	1 MIC port(CP4)
<b>Input</b>	DC8-36V
<b>Output</b>	5V@500mA
<b>Max Power Consumption</b>	29W
<b>Standby Power Consumption</b>	≈0W